



DESIGNED FOR CRUSHING BALLAST, DEBRIS AND RECYCLING

Very low production of fines
Big feeding capacity up to 650 mm

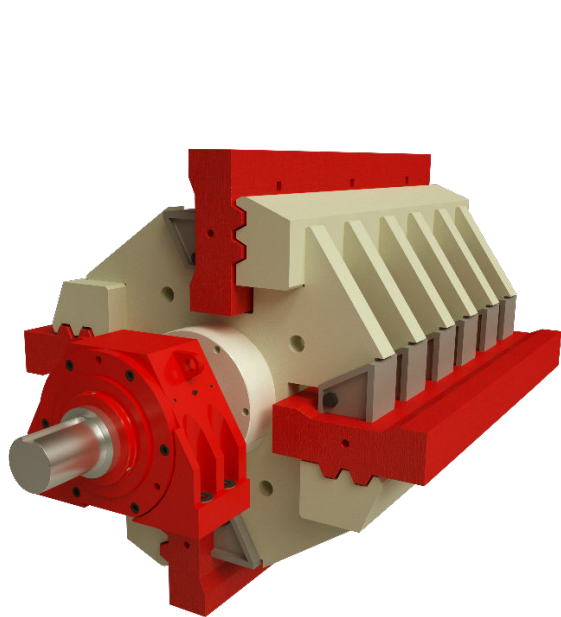

ICR-P Geminis	1209	1213
Diameter (mm)	1270	1270
Length (mm)	935	1400
Weight (kg)	2566	3751
Bars (u)	8	12
Arms (u)	4	4


IMPROVE YOUR PERFORMANCE

ALL OUR WEAR PARTS ARE AVAILABLE IN:


Ceramic / High Chrome / Martensitic



- Primary impact crusher very versatile. It can perform primary and secondary works.
- Perfect cubical shape by 2 impact aprons and its standard hydraulic adjustment system.
- Maximum feeding size up to 650 mm.
- Output size 0-140 mm (in a single pass).
- Easy and quick access to the crushing chamber through 4 lateral doors.
- Interchangeable consumable parts.
- Lifting system to simplify maintenance of consumable parts.
- Impact plates and blow bars made of high chrome, also available in ceramic format for abrasive minerals and martensitic for debris.
- 2 blow bars positions, efficiency of original casting.
- Oversized and reinforced rotor.
- Thanks to the DINAFLOW system together with the rotor impact with horizontal axis crushing system, the inertia produced by its movement is used to generate electricity, reducing the consumption of electrical energy.

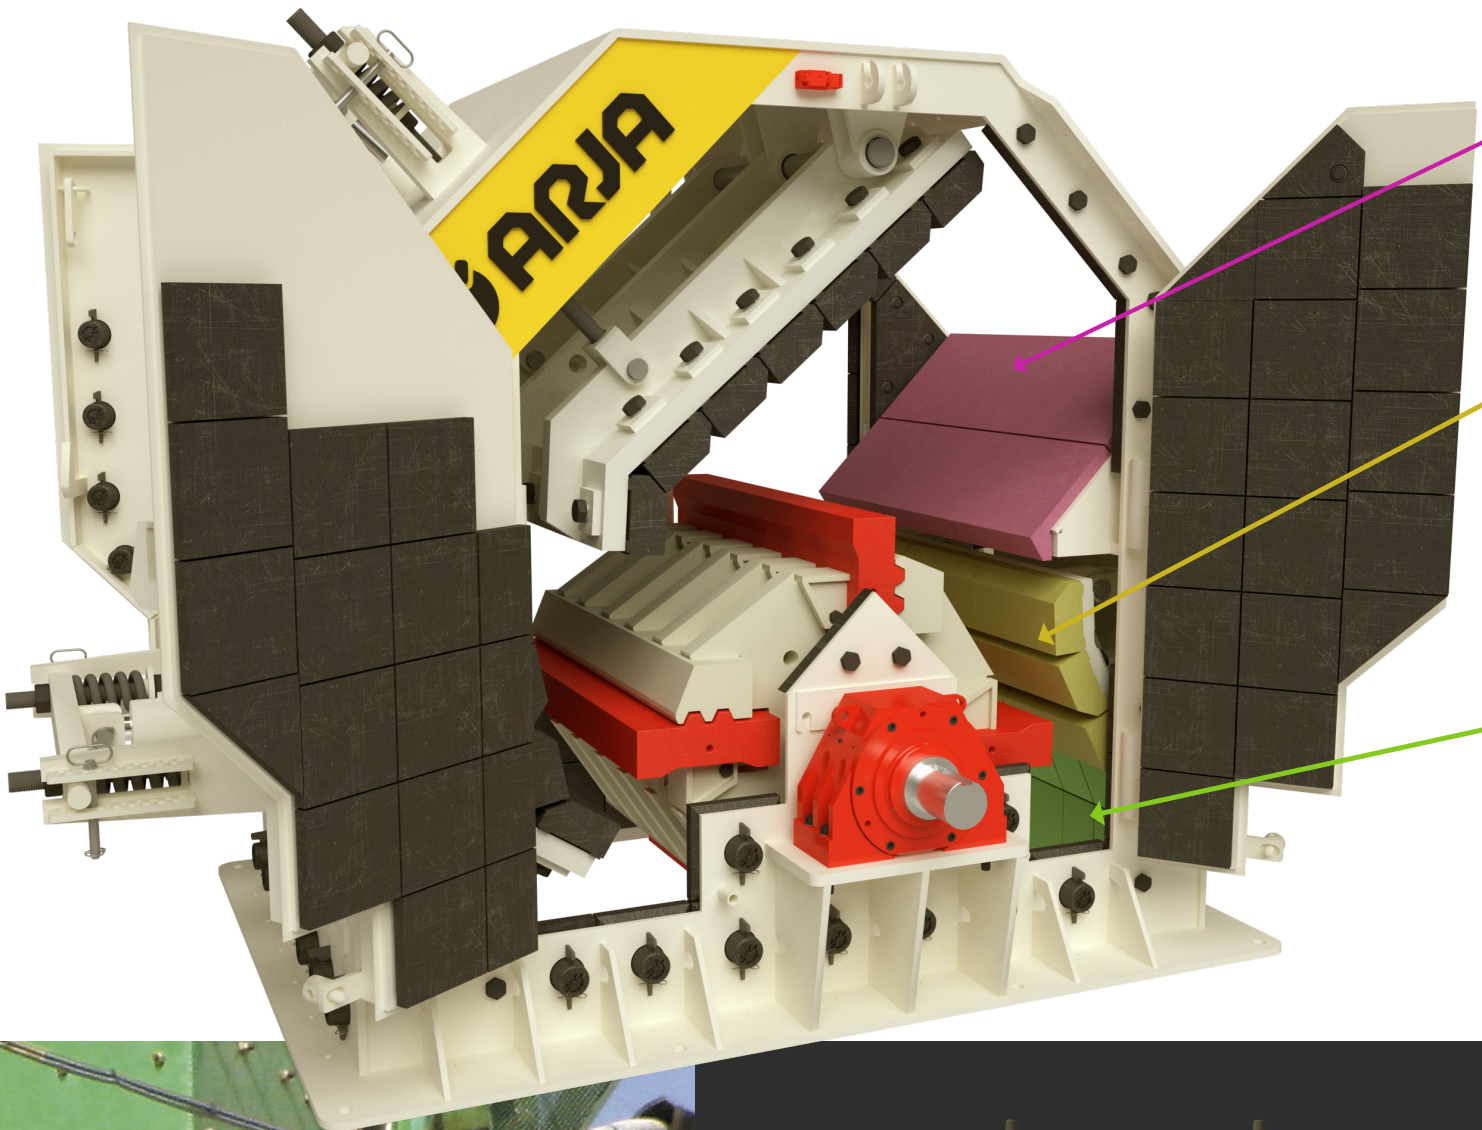

- Input ramp**
 - Lined with casting, for a longer durability.
 - Interchangeable parts.
 - Easy access from the outside for a quick maintenance.
- Anti-return apron**
 - Keeps the material inside the crushing chamber.
 - Adjustable.
 - Easy maintenance from outside.
 - Forces the small sizes to pass through the crushing chamber.
- Square with heel**
 - Protects the housing of the crusher when the anti-return apron is adjusted due to it wear.

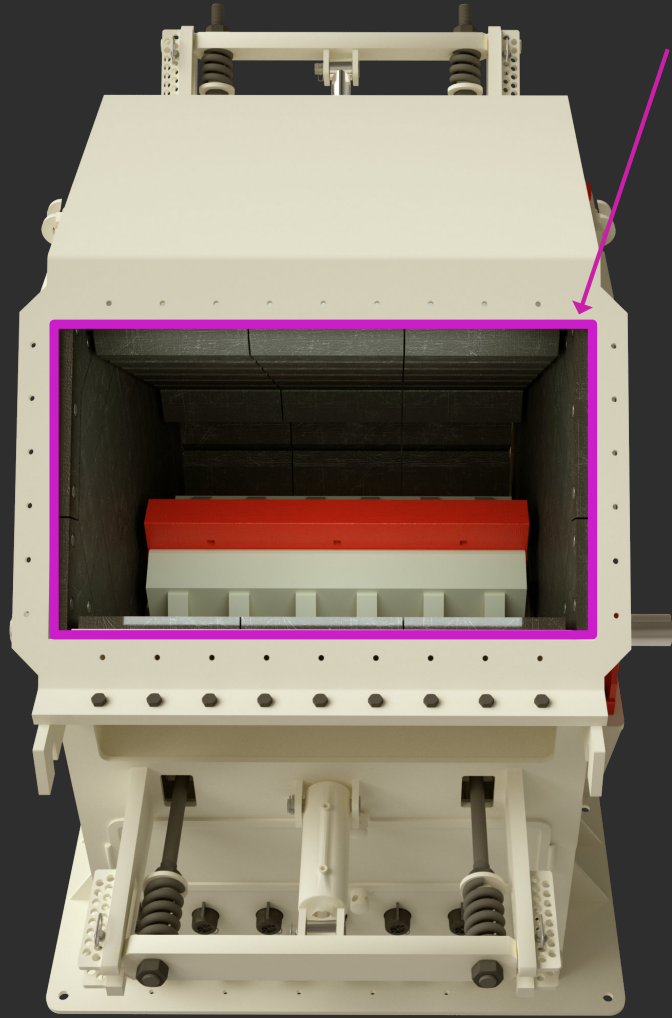

- Feeding inlet**
 - Maximum feeding size up to 650 mm.
 - The feeding inlet design has an anti-bounce system.
 - This system minimizes the wear on the hoppers and conveyor belts breakdown.

